

8 X 8

M12

3

3

2





2

2



LONG DISTANCE

LONG DISTANCE

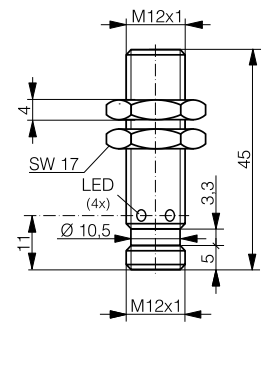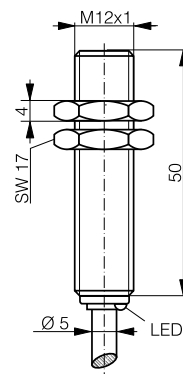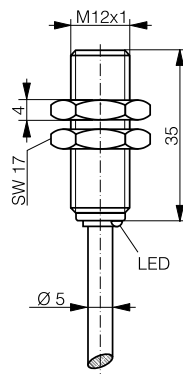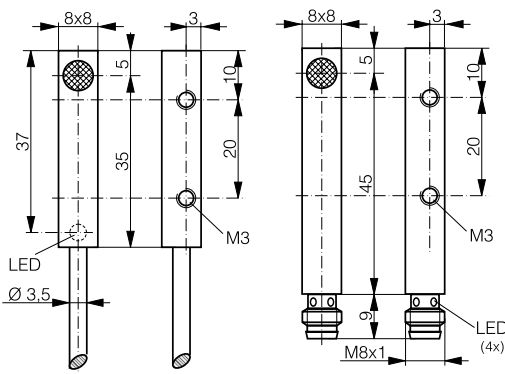

Chrome-plated brass	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass
PVC cable type 2	Connector S8	PVC cable type 8	PVC cable type 8	Connector S12
IP 67	IP 67	IP 67	IP 67	IP 67
Quasi-embeddable	Quasi-embeddable	Embeddable	Embeddable	Embeddable
1,000 Hz	1,000 Hz	3,000 Hz	3,000 Hz	3,000 Hz
Table 1	Table 1	Table 1	Table 1	Table 1
Diagram 1	Diagram 1	Diagram 1	Diagram 1	Diagram 2
Built-in	Built-in	Built-in	Built-in	Built-in
10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C
≤ 200 mA	≤ 200 mA	≤ 200 mA	≤ 200 mA	≤ 200 mA
CE, UL, RoHS	CE, UL, RoHS	CE, CCC, UL, RoHS	CE, CCC, UL, RoHS	CE, CCC, UL, RoHS

DW-AD-501-C8	DW-AS-501-C8	DW-AD-601-M12-120	DW-AD-601-M12	DW-AS-601-M12-120
DW-AD-502-C8	DW-AS-502-C8	DW-AD-602-M12-120	DW-AD-602-M12	DW-AS-602-M12-120
DW-AD-503-C8	DW-AS-503-C8	DW-AD-603-M12-120	DW-AD-603-M12	DW-AS-603-M12-120
DW-AD-504-C8	DW-AS-504-C8	DW-AD-604-M12-120	DW-AD-604-M12	DW-AS-604-M12-120
	A, B			G, H, M, N (N.O.); M, N (N.C.)

Inductive

Photoelectric

Optical fibers

Ultrasonic

Capacitive




Cables & connectors

Accessories

Glossary

Index

HOUSING SIZE	M12		
OPERATING DISTANCE MM	2	4	4

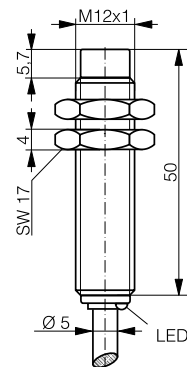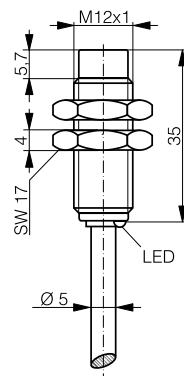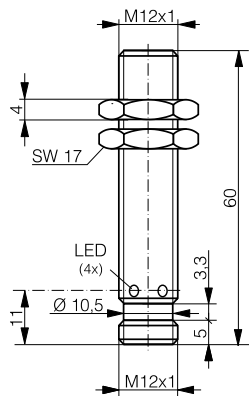

- 1) Standard cable length 2 m. Non-standard cable lengths and types on request. Cable type see page 271.
- 2) see page 132
- 3) see page 133
- 4) see page 268

TECHNICAL DATA

Housing material	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass
Connection ¹⁾	Connector S12	PVC cable type 8	PVC cable type 8
Degree of protection	IP 67	IP 67	IP 67
Mounting	Embeddable	Non-embeddable	Non-embeddable
Max. switching frequency	3,000 Hz	2,000 Hz	2,000 Hz
Additional technical data ²⁾	Table 1	Table 1	Table 1
Wiring ³⁾	Diagram 2	Diagram 1	Diagram 1
LED	Built-in	Built-in	Built-in
Supply voltage range	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
Ambient temperature range	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C
Output current	≤ 200 mA	≤ 200 mA	≤ 200 mA
Approvals	CE, CCC, UL, RoHS	CE, CCC, UL, RoHS	CE, CCC, UL, RoHS

PART REFERENCES: (BOLD: PREFERRED TYPES)

NPN N.O.	DW-AS-601-M12	DW-AD-611-M12-120	DW-AD-611-M12
NPN N.C.	DW-AS-602-M12	DW-AD-612-M12-120	DW-AD-612-M12
PNP N.O.	DW-AS-603-M12	DW-AD-613-M12-120	DW-AD-613-M12
PNP N.C.	DW-AS-604-M12	DW-AD-614-M12-120	DW-AD-614-M12
Compatible connectors ⁴⁾	G, H, M, N (N.O.); M, N (N.C.)		

M12

4

4

4

4






4



INCREASED DISTANCE

INCREASED DISTANCE

INCREASED DISTANCE

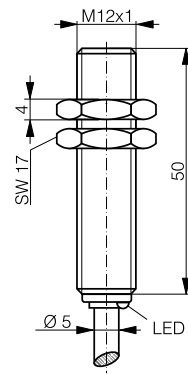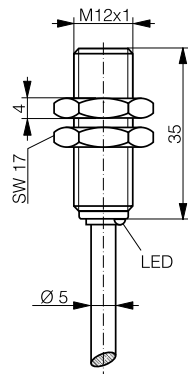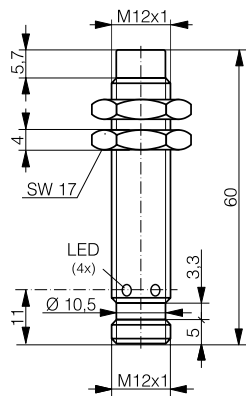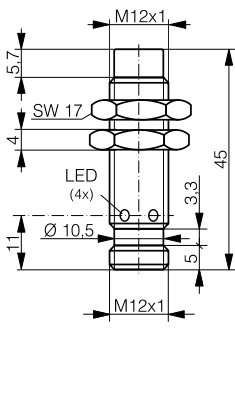

Chrome-plated brass	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass
Connector S12	Connector S12	PVC cable type 8	PVC cable type 8	Connector S12
IP 67	IP 67	IP 67	IP 67	IP 67
Non-embeddable	Non-embeddable	Embeddable	Embeddable	Embeddable
2,000 Hz	2,000 Hz	2,500 Hz	2,500 Hz	2,500 Hz
Table 1	Table 1	Table 1	Table 1	Table 1
Diagram 2	Diagram 2	Diagram 1	Diagram 1	Diagram 2
Built-in	Built-in	Built-in	Built-in	Built-in
10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C
≤ 200 mA	≤ 200 mA	≤ 200 mA	≤ 200 mA	≤ 200 mA
CE, CCC, UL, RoHS	CE, CCC, UL, RoHS	CE, CCC, UL, RoHS	CE, CCC, UL, RoHS	CE, CCC, UL, RoHS

DW-AS-611-M12-120	DW-AS-611-M12	DW-AD-621-M12-120	DW-AD-621-M12	DW-AS-621-M12-120
DW-AS-612-M12-120	DW-AS-612-M12	DW-AD-622-M12-120	DW-AD-622-M12	DW-AS-622-M12-120
DW-AS-613-M12-120	DW-AS-613-M12	DW-AD-623-M12-120	DW-AD-623-M12	DW-AS-623-M12-120
DW-AS-614-M12-120	DW-AS-614-M12	DW-AD-624-M12-120	DW-AD-624-M12	DW-AS-624-M12-120
G, H, M, N (N.O.); M, N (N.C.)	G, H, M, N (N.O.); M, N (N.C.)			G, H, M, N (N.O.); M, N (N.C.)

Inductive

Photoelectric

Optical fibers

Ultrasonic

Capacitive

Cables & connectors

Accessories

Glossary




Index

HOUSING SIZE	M12		
--------------	-----	--	--

OPERATING DISTANCE MM	4	6	6
-----------------------	---	---	---



INCREASED DISTANCE	LONG DISTANCE	LONG DISTANCE
--------------------	---------------	---------------

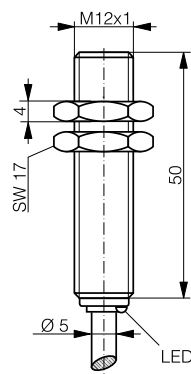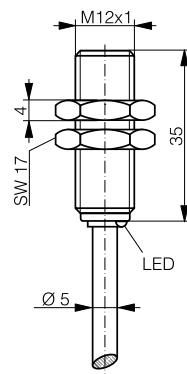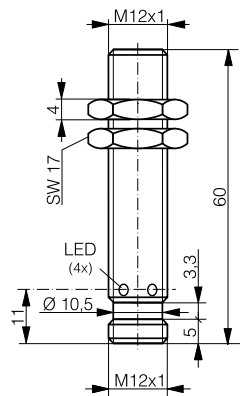

- 1) Standard cable length 2 m. Non-standard cable lengths and types on request. Cable type see page 271.
- 2) see page 132
- 3) see page 133
- 4) see page 268

TECHNICAL DATA			
----------------	--	--	--

Housing material	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass
Connection ¹⁾	Connector S12	PVC cable type 8	PVC cable type 8
Degree of protection	IP 67	IP 67	IP 67
Mounting	Embeddable	Quasi-embeddable	Quasi-embeddable
Max. switching frequency	2,500 Hz	800 Hz	800 Hz
Additional technical data ²⁾	Table 1	Table 1	Table 1
Wiring ³⁾	Diagram 2	Diagram 1	Diagram 1
LED	Built-in	Built-in	Built-in
Supply voltage range	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
Ambient temperature range	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C
Output current	≤ 200 mA	≤ 200 mA	≤ 200 mA
Approvals	CE, CCC, UL, RoHS	CE, UL, RoHS	CE, UL, RoHS

PART REFERENCES: (BOLD: PREFERRED TYPES)			
--	--	--	--

NPN N.O.	DW-AS-621-M12	DW-AD-501-M12-120	DW-AD-501-M12
NPN N.C.	DW-AS-622-M12	DW-AD-502-M12-120	DW-AD-502-M12
PNP N.O.	DW-AS-623-M12	DW-AD-503-M12-120	DW-AD-503-M12
PNP N.C.	DW-AS-624-M12	DW-AD-504-M12-120	DW-AD-504-M12
Compatible connectors ⁴⁾	G, H, M, N (N.O.); M, N (N.C.)		

M12

6

6

6*

6*

8**








LONG DISTANCE

LONG DISTANCE

ALL-METAL / 80 BAR

ALL-METAL / 80 BAR

4 X DISTANCE

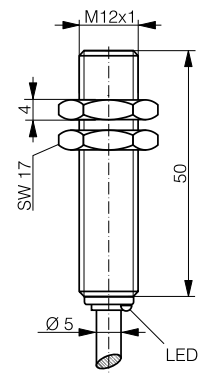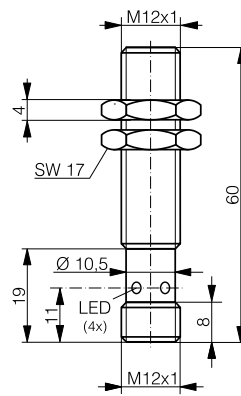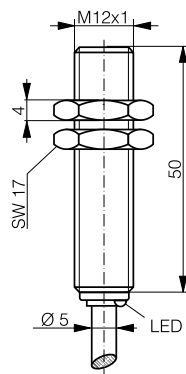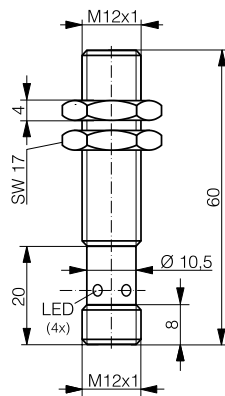

Chrome-plated brass	Chrome-plated brass	Stainless steel V2A	Stainless steel V2A	Chrome-plated brass
Connector S12	Connector S12	PUR cable type 11	Connector S12	PVC cable type 8
IP 67	IP 67	IP 68 & IP 69K	IP 68 & IP 69K	IP 67
Quasi-embeddable	Quasi-embeddable	Embeddable	Embeddable	Quasi-embeddable
800 Hz	800 Hz	600 Hz	600 Hz	400 Hz
Table 1	Table 1	Table 1	Table 1	Table 1
Diagram 2	Diagram 2	Diagram 1	Diagram 2	Diagram 1
Built-in	Built-in	Built-in	Built-in	Built-in
10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C
≤ 200 mA	≤ 200 mA	≤ 200 mA	≤ 200 mA	≤ 200 mA
CE, UL, RoHS	CE, UL, RoHS	CE, UL, RoHS	CE, UL, RoHS	CE, UL, RoHS

DW-AS-501-M12-120	DW-AS-501-M12	DW-AD-701-M12	DW-AS-701-M12	DW-AD-521-M12
DW-AS-502-M12-120	DW-AS-502-M12	DW-AD-702-M12	DW-AS-702-M12	DW-AD-522-M12
DW-AS-503-M12-120	DW-AS-503-M12	DW-AD-703-M12	DW-AS-703-M12	DW-AD-523-M12
DW-AS-504-M12-120	DW-AS-504-M12	DW-AD-704-M12	DW-AS-704-M12	DW-AD-524-M12
G, H, M, N (N.O.); M, N (N.C.)	G, H, M, N (N.O.); M, N (N.C.)		G, H, M, N (N.O.); M, N (N.C.)	




* versions with 2 mm operating distance on request ** short version in preparation

HOUSING SIZE	M12		
--------------	-----	--	--

OPERATING DISTANCE MM	8*	8	8
-----------------------	----	---	---



4 X DISTANCE	INCREASED DISTANCE	INCREASED DISTANCE
--------------	--------------------	--------------------

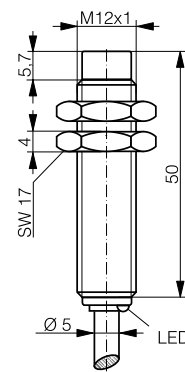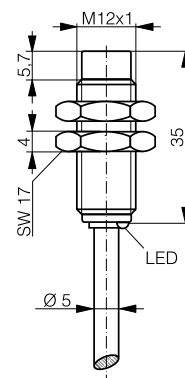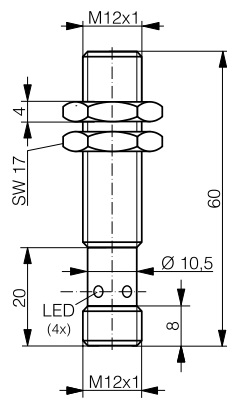

- 1) Standard cable length 2 m. Non-standard cable lengths and types on request. Cable type see page 271.
- 2) see page 132
- 3) see page 133
- 4) see page 268

TECHNICAL DATA			
----------------	--	--	--

Housing material	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass
Connection ¹⁾	Connector S12	PVC cable type 8	PVC cable type 8
Degree of protection	IP 67	IP 67	IP 67
Mounting	Quasi-embeddable	Non-embeddable	Non-embeddable
Max. switching frequency	400 Hz	1,400 Hz	1,400 Hz
Additional technical data ²⁾	Table 1	Table 1	Table 1
Wiring ³⁾	Diagram 2	Diagram 1	Diagram 1
LED	Built-in	Built-in	Built-in
Supply voltage range	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
Ambient temperature range	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C
Output current	≤ 200 mA	≤ 200 mA	≤ 200 mA
Approvals	CE, UL, RoHS	CE, CCC, UL, RoHS	CE, CCC, UL, RoHS

PART REFERENCES: (BOLD: PREFERRED TYPES)			
--	--	--	--

NPN N.O.	DW-AS-521-M12	DW-AD-631-M12-120	DW-AD-631-M12
NPN N.C.	DW-AS-522-M12	DW-AD-632-M12-120	DW-AD-632-M12
PNP N.O.	DW-AS-523-M12	DW-AD-633-M12-120	DW-AD-633-M12
PNP N.C.	DW-AS-524-M12	DW-AD-634-M12-120	DW-AD-634-M12
Compatible connectors ⁴⁾	G, H, M, N (N.O.); M, N (N.C.)		

* short version in preparation

M12

8

8

10

10

10








INCREASED DISTANCE

INCREASED DISTANCE

LONG DISTANCE

LONG DISTANCE

LONG DISTANCE

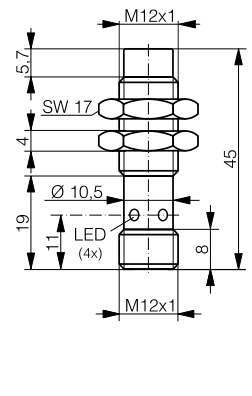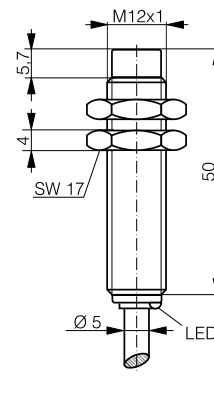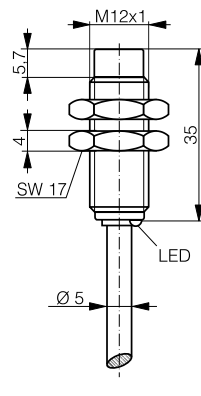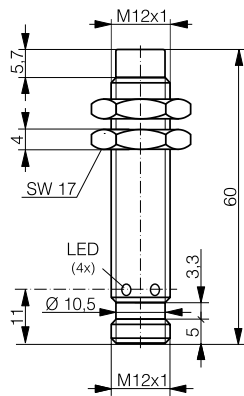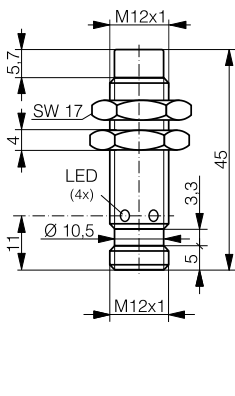

Chrome-plated brass	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass	Chrome-plated brass
Connector S12	Connector S12	PVC cable type 8	PVC cable type 8	Connector S12
IP 67	IP 67	IP 67	IP 67	IP 67
Non-embeddable	Non-embeddable	Non-embeddable	Non-embeddable	Non-embeddable
1,400 Hz	1,400 Hz	400 Hz	400 Hz	400 Hz
Table 1	Table 1	Table 1	Table 1	Table 1
Diagram 2	Diagram 2	Diagram 1	Diagram 1	Diagram 2
Built-in	Built-in	Built-in	Built-in	Built-in
10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C
≤ 200 mA	≤ 200 mA	≤ 200 mA	≤ 200 mA	≤ 200 mA
CE, CCC, UL, RoHS	CE, CCC, UL, RoHS	CE, UL, RoHS	CE, UL, RoHS	CE, UL, RoHS

DW-AS-631-M12-120	DW-AS-631-M12	DW-AD-511-M12-120	DW-AD-511-M12	DW-AS-511-M12-120
DW-AS-632-M12-120	DW-AS-632-M12	DW-AD-512-M12-120	DW-AD-512-M12	DW-AS-512-M12-120
DW-AS-633-M12-120	DW-AS-633-M12	DW-AD-513-M12-120	DW-AD-513-M12	DW-AS-513-M12-120
DW-AS-634-M12-120	DW-AS-634-M12	DW-AD-514-M12-120	DW-AD-514-M12	DW-AS-514-M12-120
G, H, M, N (N.O.); M, N (N.C.)	G, H, M, N (N.O.); M, N (N.C.)			G, H, M, N (N.O.); M, N (N.C.)

Inductive

Photoelectric

Optical fibers

Ultrasonic

Capacitive

Cables & connectors

Accessories

Glossary




Index

HOUSING SIZE	M12		
--------------	-----	--	--

OPERATING DISTANCE MM	10	10*	10*
-----------------------	----	-----	-----



LONG DISTANCE	ALL-METAL / 80 BAR	ALL-METAL / 80 BAR
---------------	--------------------	--------------------

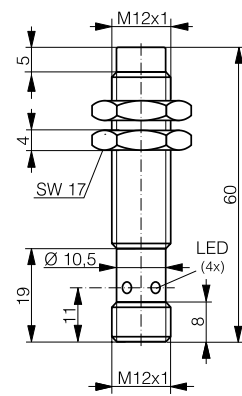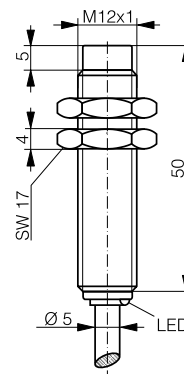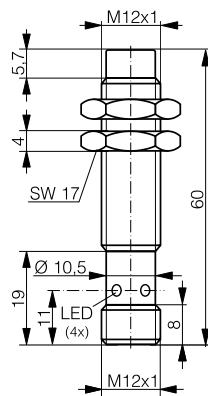

- 1) Standard cable length 2 m. Non-standard cable lengths and types on request. Cable type see page 271.
- 2) see page 132
- 3) see page 133
- 4) see page 268

TECHNICAL DATA			
----------------	--	--	--

Housing material	Chrome-plated brass	Stainless steel V2A	Stainless steel V2A
Connection ¹⁾	Connector S12	PUR cable type 11	Connector S12
Degree of protection	IP 67	IP 68 & IP 69K	IP 68 & IP 69K
Mounting	Non-embeddable	Non-embeddable	Non-embeddable
Max. switching frequency	400 Hz	400 Hz	400 Hz
Additional technical data ²⁾	Table 1	Table 1	Table 1
Wiring ³⁾	Diagram 2	Diagram 1	Diagram 2
LED	Built-in	Built-in	Built-in
Supply voltage range	10 ... 30 VDC	10 ... 30 VDC	10 ... 30 VDC
Ambient temperature range	-25 ... +70 °C	-25 ... +70 °C	-25 ... +70 °C
Output current	≤ 200 mA	≤ 200 mA	≤ 200 mA
Approvals	CE, UL, RoHS	CE, UL, RoHS	CE, UL, RoHS

PART REFERENCES: (BOLD: PREFERRED TYPES)			
--	--	--	--

NPN N.O.	DW-AS-511-M12	DW-AD-711-M12	DW-AS-711-M12
NPN N.C.	DW-AS-512-M12	DW-AD-712-M12	DW-AS-712-M12
PNP N.O.	DW-AS-513-M12	DW-AD-713-M12	DW-AS-713-M12
PNP N.C.	DW-AS-514-M12	DW-AD-714-M12	DW-AS-714-M12
Compatible connectors ⁴⁾	G, H, M, N (N.O.); M, N (N.C.)		G, H, M, N (N.O.); M, N (N.C.)

* versions with 4 mm operating distance on request